


TECHNICAL SPECIFICATIONS					DIMENSIONS										
Model	Filtering surface	Number of filtering elements	Number of cleaning valves	Compressed air consumption	A	B	B1	H Tot	In	B In	H In	Out	A Out	H Out	Weight
	[m ²]	[-]	[-]	[Nl/activ.]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
CSV04x0515	12	20	4	87	1325	1150	1470	4511	Ø180	312	3760	Ø220	662	4255	720
CSV04x0520	15	20	4	87	1325	1150	1470	5011	Ø200	312	4250	Ø250	662	4755	820
CSV04x0525	19	20	4	87	1325	1150	1470	5511	Ø220	312	4740	Ø280	662	5255	895
CSV06x0515	17	30	6	87	1675	1150	1470	4761	Ø200	312	4000	Ø280	837	4505	855
CSV06x0520	23	30	6	87	1675	1150	1470	5261	Ø250	312	4475	Ø315	837	5005	955
CSV06x0525	29	30	6	87	1675	1150	1470	5761	Ø280	312	4960	Ø350	837	5505	1055
CSV06x0615	21	36	6	87	1675	1325	1645	4761	Ø220	400	3990	Ø300	837	4505	910
CSV06x0620	28	36	6	87	1675	1325	1645	5261	Ø280	400	4460	Ø350	837	5005	1010
CSV06x0625	35	36	6	87	1675	1325	1645	5761	Ø300	400	4950	350 x 350	837	5505	1135
CSV06x0715	24	42	6	87	1675	1500	1820	4761	Ø250	750	3975	Ø315	837	4505	965
CSV06x0720	32	42	6	87	1675	1500	1820	5261	Ø280	750	4460	350 x 350	837	5005	1065
CSV06x0725	41	42	6	87	1675	1500	1820	5761	Ø315	750	4942	400 x 350	837	5505	1190
CSV06x0815	28	48	6	87	1675	1675	1995	4761	Ø280	837	3960	Ø350	837	4505	1025
CSV06x0820	37	48	6	87	1675	1675	1995	5261	Ø300	837	4450	400 x 350	837	5005	1150
CSV06x0825	46	48	6	87	1675	1675	1995	5761	Ø350	837	4925	450 x 350	837	5505	1275
CSV07x0715	28	49	7	87	1850	1500	1820	4761	Ø280	750	3960	Ø350	925	4505	1025
CSV07x0720	38	49	7	87	1850	1500	1820	5261	Ø315	750	4442	400 x 350	925	5005	1150
CSV07x0725	47	49	7	87	1850	1500	1820	5761	Ø350	750	4925	450 x 350	925	5505	1275
CSV07x0815	32	56	7	87	1850	1675	1995	4761	Ø280	837	3960	350 x 350	925	4505	1055
CSV07x0820	43	56	7	87	1850	1675	1995	5261	Ø315	837	4442	450 x 350	925	5005	1205
CSV07x0825	54	56	7	87	1850	1675	1995	5761	Ø380	837	4910	550 x 350	925	5505	1355
CSV08x0815	37	64	8	87	2025	1675	1995	4861	Ø300	837	4050	400 x 350	1012	4605	1165
CSV08x0820	49	64	8	87	2025	1675	1995	5361	Ø350	837	4525	500 x 350	1012	5105	1315
CSV08x0825	62	64	8	87	2025	1675	1995	5861	Ø400	837	5000	600 x 350	1012	5605	1465
CSV09x0815	42	72	9	87	2200	1675	1995	4961	Ø315	837	4142	400 x 350	1100	4705	1220
CSV09x0820	56	72	9	87	2200	1675	1995	5461	Ø380	837	4610	550 x 350	1100	5205	1345
CSV09x0825	70	72	9	87	2200	1675	1995	5961	350 x 400	837	5100	700 x 350	1100	5705	1520
CSV09x0920	63	81	9	87	2200	1850	2170	5461	Ø400	925	4600	600 x 350	1100	5205	1430
CSV09x0925	78	81	9	87	2200	1850	2170	5961	Ø450	925	5075	750 x 350	1100	5705	1605
CSV09x0930	94	81	9	217	2200	1850	2210	6461	Ø480	925	5560	900 x 350	1100	6205	1805
CSV09x1020	70	90	9	87	2200	2025	2345	5361	350 x 400	837	4500	700 x 350	1100	5105	1515
CSV09x1025	87	90	9	87	2200	2025	2345	5861	350 x 500	837	4950	850 x 350	1100	5605	1690
CSV09x1030	104	90	9	217	2200	2025	2385	6361	350 x 600	837	5400	1000 x 350	1100	6105	1915

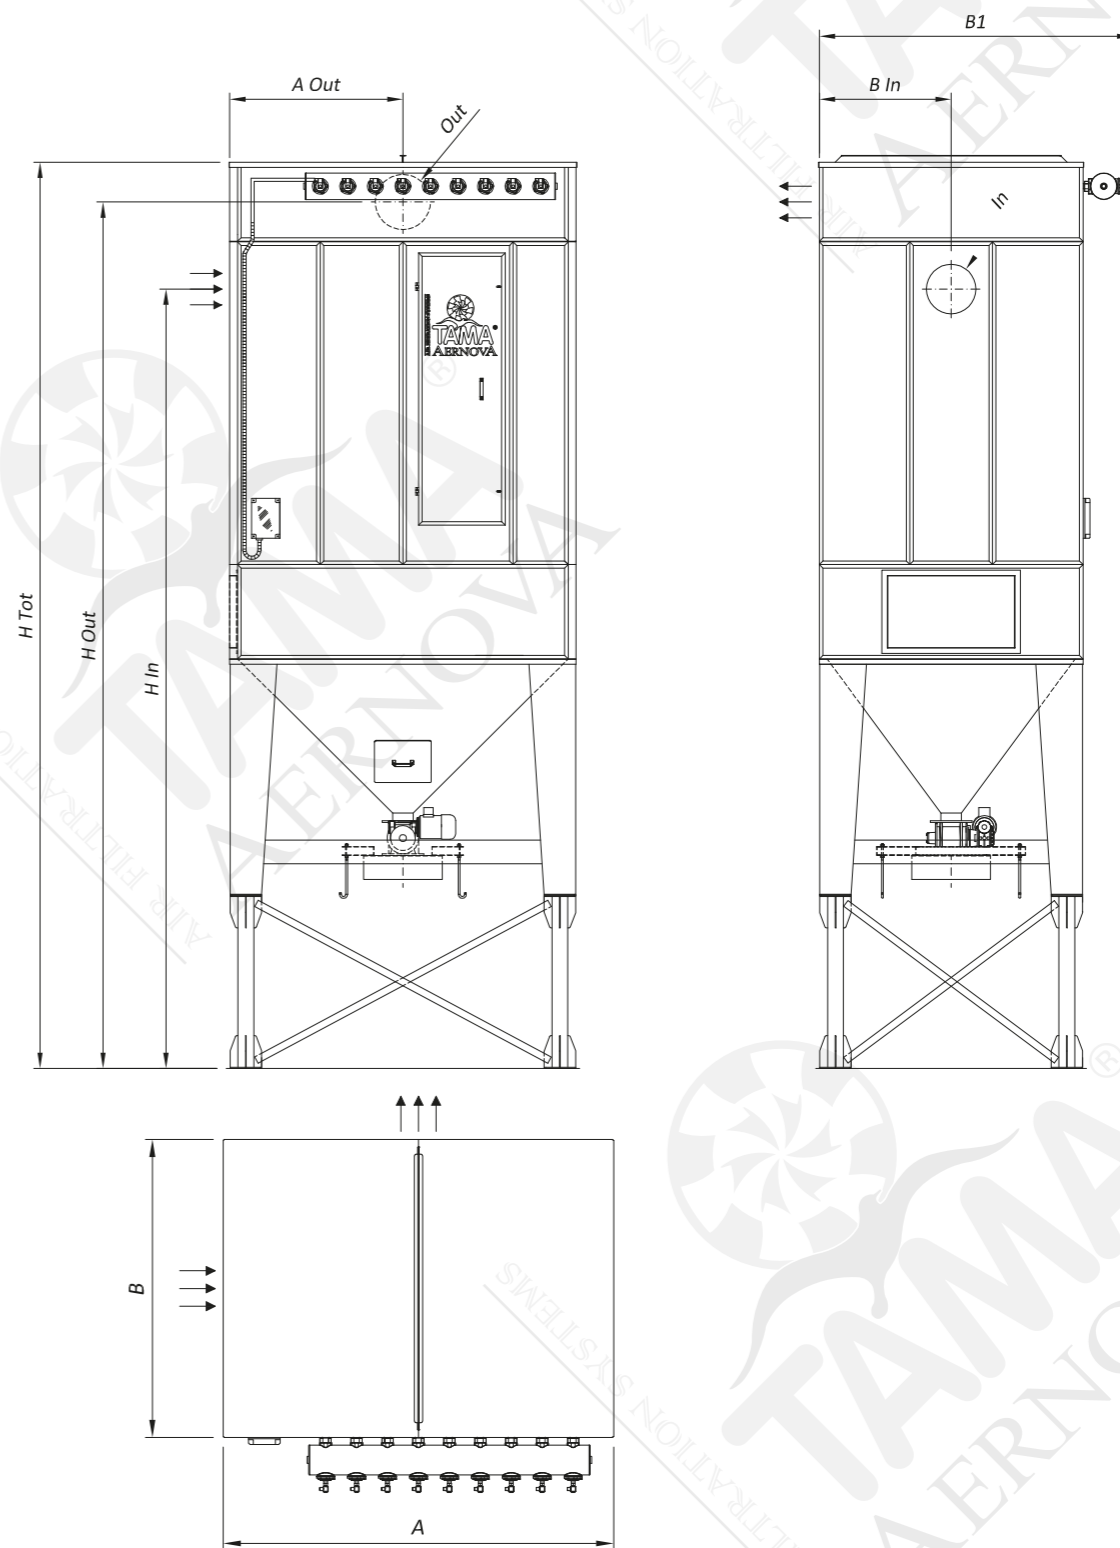

TECHNICAL SPECIFICATIONS		
Max working negative pressure	Pa	5000
Working Temperature	°C	-10<T<80
Electric control panel feeding	230 V AC 50Hz	
Bag cleaning system	pulse-jet	
Compressed air tank working pressure	bar	5
Rotary valve solid discharge **	mc/h	2
Rotary valve power **	kW	0,5

** The rotary valve and the screw conveyer are available also with other configurations. The data are referred to a single rotary valve.