

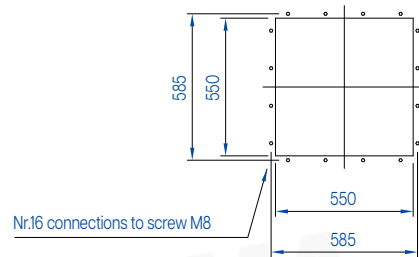
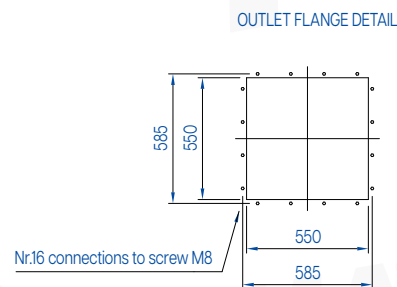
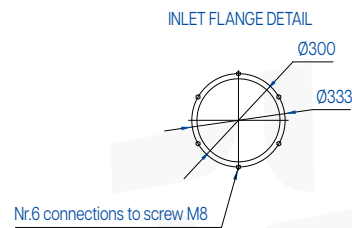
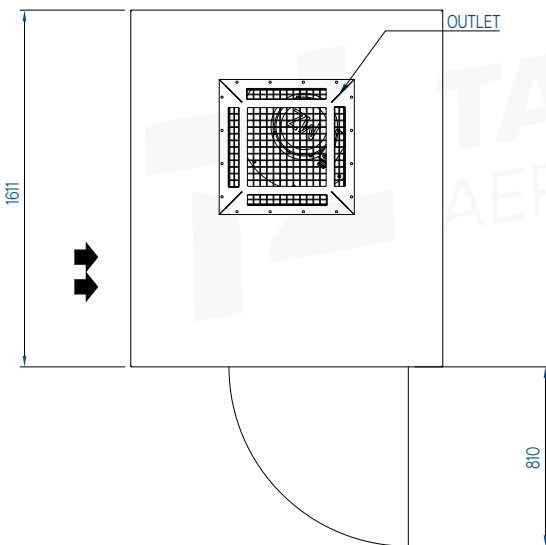


OUTLET FLANGE DETAIL

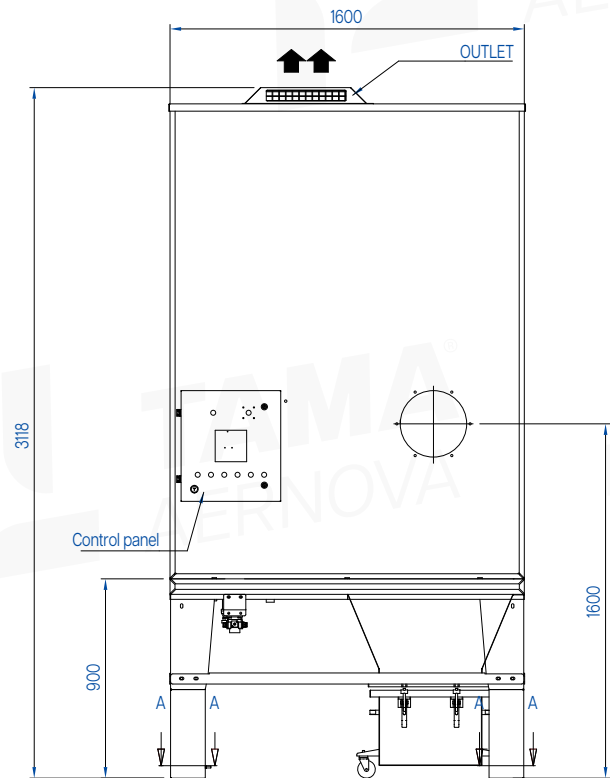






TECHNICAL SPECIFICATIONS		OPF-S 2x2
Number of filtering elements	nr	4
Filtering surface	m ²	40
Max working under pressure	Pa	5000
Working temperature	°C	-10<T<40
Pneumatic feeding (ISO Class 2.4.1 according to 8573-1:2010)	Ø-bar	1/2" GAS
Electric feeding		400 V - 50Hz
Cartridges cleaning system		pulse-jet
Number of cleaning valves	nr	4
Type of cleaning valves		Ø1" - 24 V DC
Compressed air tank working pressure	bar	4,5

PERFORMANCE CHARACTERISTICS		
Nominal air flow	m ³ /h	2500
Nominal static pressure	Pa	3600
Nominal fan power	kW	5,5
Max compressed air consumption	NI/min	360

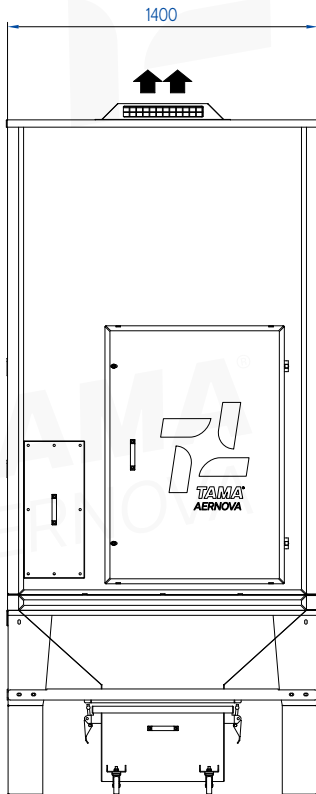





TECHNICAL SPECIFICATIONS		OPF-S 2x3
Number of filtering elements	nr	6
Filtering surface	m ²	60
Max working under pressure	Pa	5000
Working temperature	°C	-10<T<40
Pneumatic feeding (ISO Class 2.4.1 according to 8573-1:2010)	Ø-bar	1/2" GAS
Electric feeding		400 V - 50Hz
Cartridges cleaning system		pulse-jet
Number of cleaning valves	nr	6
Type of cleaning valves		Ø1" - 24 V DC
Compressed air tank working pressure	bar	4,5

PERFORMANCE CHARACTERISTICS		
Nominal air flow	m ³ /h	4000
Nominal static pressure	Pa	3500
Nominal fan power	kW	7,5
Max compressed air consumption	NI/min	360

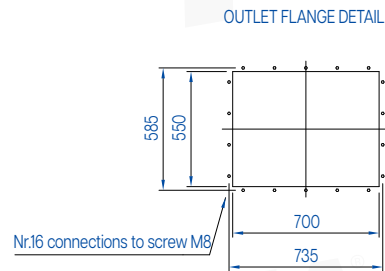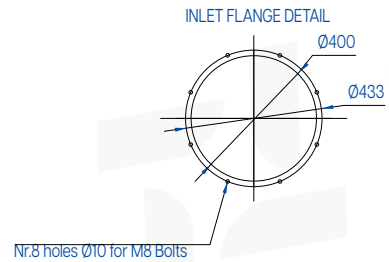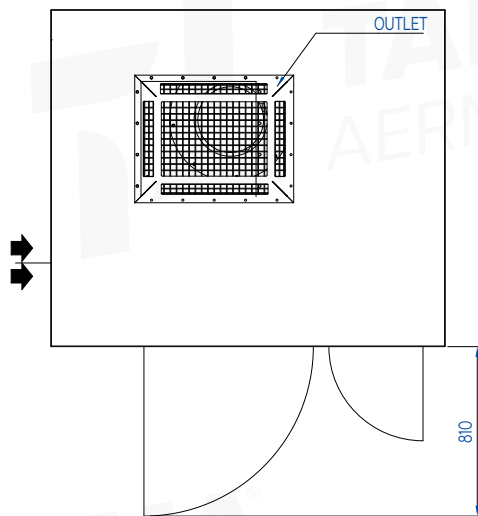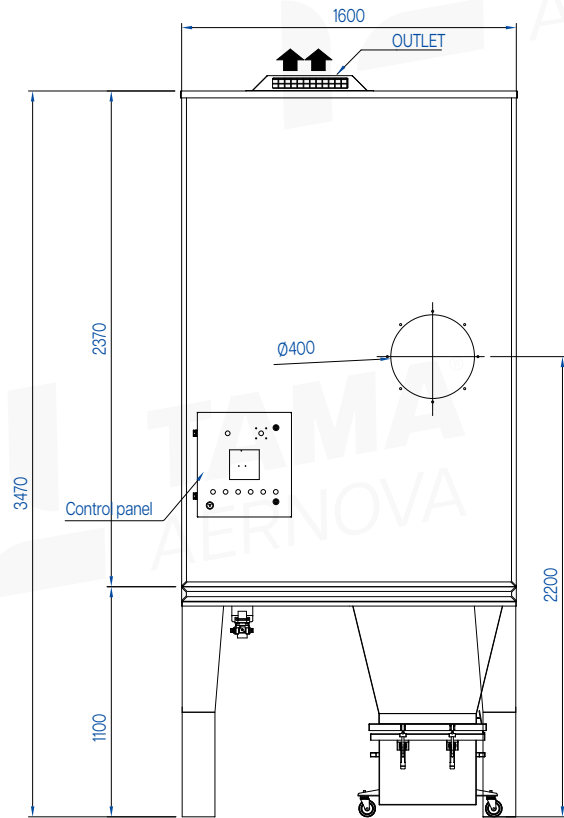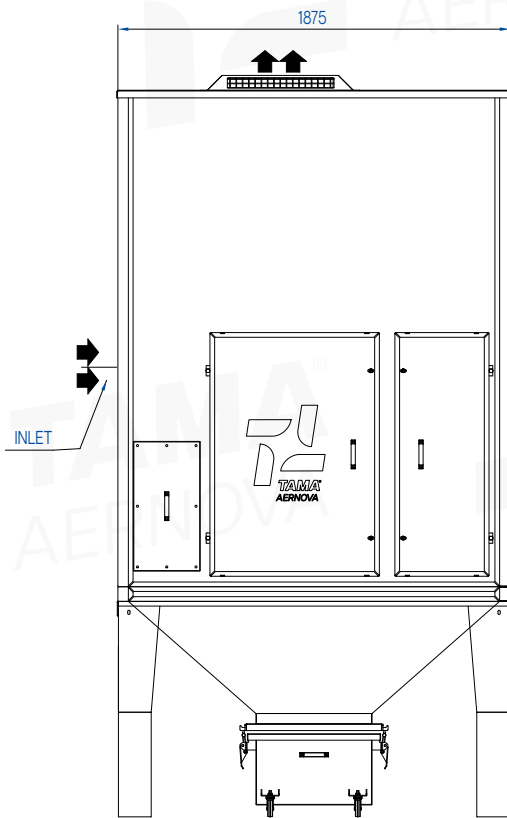

TECHNICAL SPECIFICATIONS		OPF-S 3x3
Number of filtering elements	nr	9
Filtering surface	m ²	92
Max working under pressure	Pa	5000
Working temperature	°C	-10<T<40
Pneumatic feeding (ISO Class 2.4.1 according to 8573-1:2010)	Ø-bar	1/2" GAS
Electric feeding		400 V - 50Hz
Cartridges cleaning system		pulse-jet
Number of cleaning valves	nr	9
Type of cleaning valves		Ø1" - 24 V DC
Compressed air tank working pressure	bar	4,5

PERFORMANCE CHARACTERISTICS		
Nominal air flow	m ³ /h	6000
Nominal static pressure	Pa	3700
Nominal fan power	kW	11
Max compressed air consumption	NI/min	360

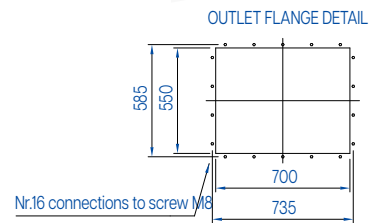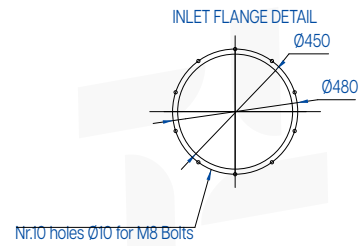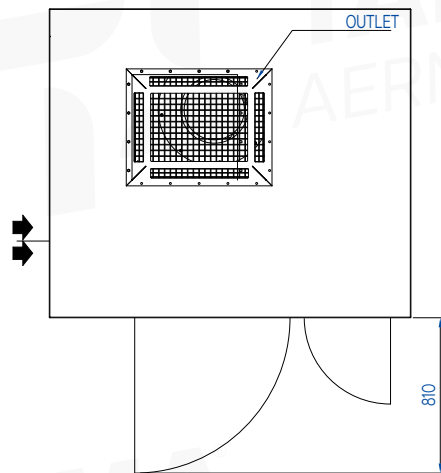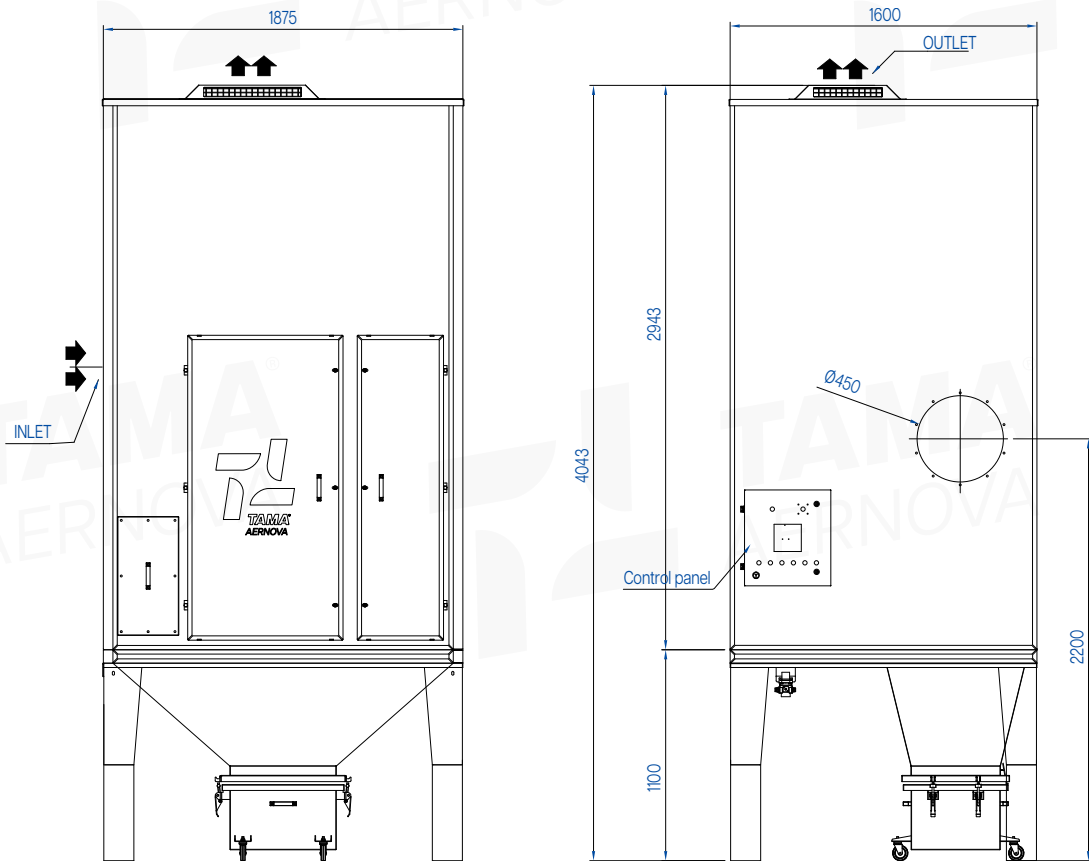

TECHNICAL SPECIFICATIONS		OPF-S 3x4
Number of filtering elements	nr	12
Filtering surface	m ²	122
Max working under pressure	Pa	5000
Working temperature	°C	-10<T<40
Pneumatic feeding (ISO Class 2.4.1 according to 8573-1:2010)	Ø-bar	1/2" GAS
Electric feeding		400 V - 50Hz
Cartridges cleaning system		pulse-jet
Number of cleaning valves	nr	12
Type of cleaning valves		Ø1" - 24 V DC
Compressed air tank working pressure	bar	4,5

PERFORMANCE CHARACTERISTICS		
Nominal air flow	m ³ /h	8000
Nominal static pressure	Pa	3900
Nominal fan power	kW	15
Max compressed air consumption	NI/min	360