
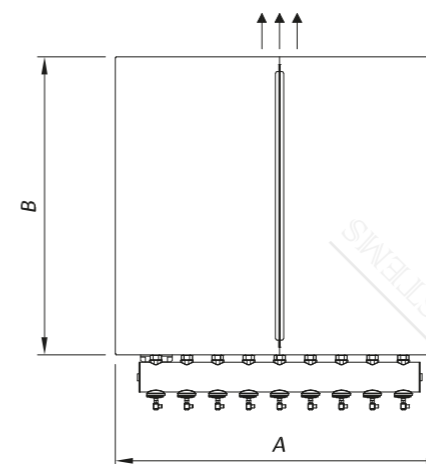


TECHNICAL SPECIFICATIONS					DIMENSIONS									
Model	Filtering surface	Number of filtering elements	Number of cleaning valves	Compressed air consumption	A	B	B1	H Tot	In	B In	Out	A Out	H Out	Weight
	[m ²]	[-]	[-]	[l/activ.]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
NS-NSA04x0515	12	20	4	87	975	1150	1470	2161	∅180	575	∅220	487	1905	475
NS-NSA04x0520	15	20	4	87	975	1150	1470	2661	∅200	575	∅250	487	2405	550
NS-NSA04x0525	19	20	4	87	975	1150	1470	3161	∅220	575	∅280	487	2905	600
NS-NSA06x0515	17	30	6	87	1325	1150	1470	2161	∅200	575	∅280	662	1905	590
NS-NSA06x0520	23	30	6	87	1325	1150	1470	2661	∅250	575	∅315	662	2405	665
NS-NSA06x0525	29	30	6	87	1325	1150	1470	3161	∅280	575	∅350	662	2905	740
NS-NSA06x0615	21	36	6	87	1325	1325	1645	2161	∅220	662	∅300	662	1905	630
NS-NSA06x0620	28	36	6	87	1325	1325	1645	2661	∅280	662	∅350	662	2405	730
NS-NSA06x0625	35	36	6	87	1325	1325	1645	3161	∅300	662	350 x 350	662	2905	805
NS-NSA06x0715	24	42	6	87	1325	1500	1820	2161	∅250	750	∅315	662	1905	675
NS-NSA06x0720	32	42	6	87	1325	1500	1820	2661	∅280	750	350 x 350	662	2405	775
NS-NSA06x0725	41	42	6	87	1325	1500	1820	3161	∅315	750	400 x 350	662	2905	875
NS-NSA06x0815	28	48	6	87	1325	1675	1995	2161	∅280	837	∅350	662	1905	745
NS-NSA06x0820	37	48	6	87	1325	1675	1995	2661	∅300	837	400 x 350	662	2405	845
NS-NSA06x0825	46	48	6	87	1325	1675	1995	3161	∅350	837	450 x 350	662	2905	945
NS-NSA07x0715	28	49	7	87	1500	1500	1820	2161	∅280	750	∅350	750	1905	745
NS-NSA07x0720	38	49	7	87	1500	1500	1820	2661	∅315	750	400 x 350	750	2405	845
NS-NSA07x0725	47	49	7	87	1500	1500	1820	3161	∅350	750	450 x 350	750	2905	970
NS-NSA07x0815	32	56	7	87	1500	1675	1995	2161	∅280	837	350 x 350	750	1905	790
NS-NSA07x0820	43	56	7	87	1500	1675	1995	2661	∅315	837	450 x 350	750	2405	915
NS-NSA07x0825	54	56	7	87	1500	1675	1995	3161	∅380	837	550 x 350	750	2905	1040
NS-NSA08x0815	37	64	8	87	1675	1675	1995	2161	∅300	837	400 x 350	837	1905	860
NS-NSA08x0820	49	64	8	87	1675	1675	1995	2661	∅350	837	500 x 350	837	2405	985
NS-NSA08x0825	62	64	8	87	1675	1675	1995	3161	∅400	837	600 x 350	837	2905	1110
NS-NSA09x0815	42	72	9	87	1850	1675	1995	2161	∅315	837	400 x 350	925	1905	905
NS-NSA09x0820	56	72	9	87	1850	1675	1995	2661	∅380	837	550 x 350	925	2405	1055
NS-NSA09x0825	70	72	9	87	1850	1675	1995	3161	∅420	837	700 x 350	925	2905	1180
NS-NSA09x0920	63	81	9	87	1850	1850	2170	2661	∅400	925	600 x 350	925	2405	1105
NS-NSA09x0925	78	81	9	87	1850	1850	2170	3161	∅450	925	750 x 350	925	2905	1255
NS-NSA09x0930	94	81	9	217	1850	1850	2210	3661	∅480	925	900 x 350	925	3405	1430
NS-NSA09x1020	70	90	9	87	1850	2025	2345	2661	∅420	1012	700 x 350	925	2405	1195
NS-NSA09x1025	87	90	9	87	1850	2025	2345	3161	∅480	1012	850 x 350	925	2905	1345
NS-NSA09x1030	104	90	9	217	1850	2025	2385	3661	∅520	1012	1000 x 350	925	3405	1520

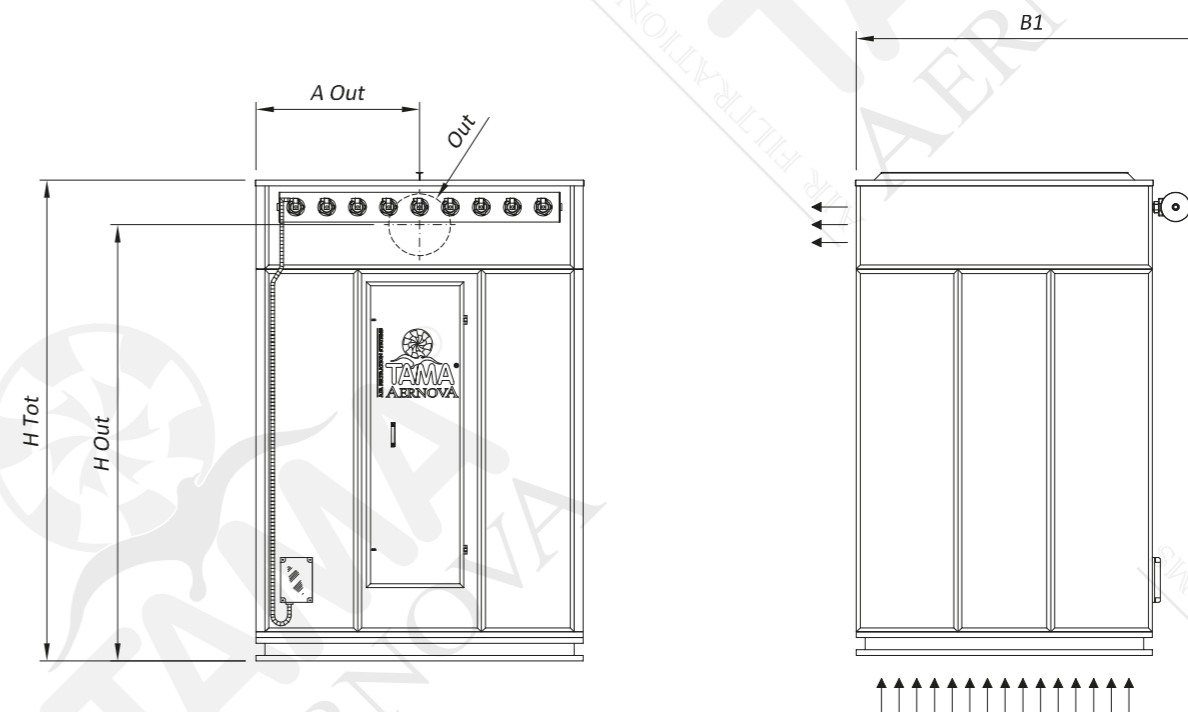

TECHNICAL SPECIFICATIONS		
Certification code	II 3 D Ex h IIIC T200°C Dc -10°C<T<40°C	
Max working negative pressure	Pa	5000
Working Temperature	°C	-10<T<80
Electric control panel feeding	230 V AC 50Hz	
Bag cleaning system	pulse-jet	
Compressed air tank working pressure	bar	5