



TECHNICAL SPECIFICATIONS					DIMENSIONS										
Model	Filtering surface	Number of filtering elements	Number of cleaning valves	Compressed air consumption	A	B	B1	H Tot	In	B In	H In	Out	A Out	H Out	Weight
	[m <sup>2</sup> ]				[N/activa]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
CSB145-02x0207	10	4	2	87	1180	700	1020	2261	Ø120	350	1540	Ø150	590	2005	375
CSB145-02x0210	15	4	2	87	1180	700	1020	2561	Ø150	350	1825	Ø180	590	2305	400
CSB145-02x0212	18	4	2	87	1180	700	1020	2761	Ø150	350	2025	Ø200	590	2505	425
CSB145-02x0407	21	8	2	87	1180	1180	1500	2261	Ø180	590	1510	Ø220	590	2005	540
CSB145-02x0410	30	8	2	87	1180	1180	1500	2561	Ø200	590	1800	Ø280	590	2305	590
CSB145-02x0412	37	8	2	87	1180	1180	1500	2761	Ø220	590	1990	Ø300	590	2505	615
CSB145-03x0307	24	9	3	87	1420	940	1260	2561	Ø180	470	1810	Ø220	710	2305	540
CSB145-03x0310	34	9	3	87	1420	940	1260	2861	Ø220	470	2090	Ø280	710	2605	590
CSB145-03x0312	41	9	3	87	1420	940	1260	3061	Ø250	470	2275	Ø315	710	2805	640
CSB145-03x0407	31	12	3	87	1420	1180	1500	2561	Ø200	590	1800	Ø280	710	2305	620
CSB145-03x0410	45	12	3	87	1420	1180	1500	2861	Ø250	590	2075	Ø315	710	2605	695
CSB145-03x0412	55	12	3	87	1420	1180	1500	3061	Ø280	590	2260	Ø350	710	2805	745
CSB145-04x0407	42	16	4	87	1660	1180	1500	2761	Ø250	590	1975	Ø315	830	2505	705
CSB145-04x0410	61	16	4	87	1660	1180	1500	3061	Ø300	590	2250	350 x 350	830	2805	780
CSB145-04x0412	73	16	4	87	1660	1180	1500	3261	Ø315	590	2442	400 x 350	830	3005	830
CSB145-04x0507	52	20	4	217	1660	1420	1780	2761	Ø280	710	1960	Ø350	830	2505	865
CSB145-04x0510	76	20	4	217	1660	1420	1780	3061	Ø315	710	2242	400 x 350	830	2805	940
CSB145-04x0512	91	20	4	217	1660	1420	1780	3261	Ø350	710	2425	500 x 350	830	3005	990
CSB145-05x0507	66	25	5	217	1900	1420	1780	2761	Ø300	710	1950	350 x 350	950	2505	945
CSB145-05x0510	95	25	5	217	1900	1420	1780	3061	Ø350	710	2225	500 x 350	950	2805	1045
CSB145-05x0512	114	25	5	217	1900	1420	1780	3261	Ø400	710	2400	600 x 350	950	3005	1095
CSB145-05x0607	79	30	5	217	1900	1660	2020	2761	Ø315	830	1942	450 x 350	950	2505	1060
CSB145-05x0610	114	30	5	217	1900	1660	2020	3061	Ø400	830	2200	600 x 350	950	2805	1160
CSB145-05x0612	137	30	5	217	1900	1660	2020	3261	Ø450	830	2375	750 x 350	950	3005	1235
CSB325-02x0207	33-43***	4	2	217	1390	960	1320	2761	Ø250	480	1975	Ø315	695	2505	715
CSB325-02x0210	48-63***	4	2	217	1390	960	1320	3061	Ø300	480	2250	350 x 350	695	2805	765
CSB325-02x0212	58-76***	4	2	217	1390	960	1320	3261	Ø315	480	2442	400 x 350	695	3005	815
CSB325-03x0207	50-65***	6	3	217	1820	960	1320	2761	Ø300	480	1950	350 x 350	910	2505	800
CSB325-03x0210	72-94***	6	3	217	1820	960	1320	3061	350 x 300	480	2250	500 x 350	910	2805	875
CSB325-03x0212	87-113***	6	3	217	1820	960	1320	3261	350 x 400	480	2400	600 x 350	910	3005	925
CSB325-03x0307	75-98***	9	3	217	1820	1390	1750	2761	Ø380	695	1910	550 x 350	910	2505	1020
CSB325-03x0310	109-141***	9	3	217	1820	1390	1750	3061	Ø450	695	2175	750 x 350	910	2805	1120
CSB325-03x0312	131-170***	9	3	217	1820	1390	1750	3261	Ø480	695	2360	900 x 350	910	3005	1170
CSB325-04x0307	100-130***	12	4	217	2250	1390	1750	2961	Ø420	695	2090	700 x 350	1125	2705	1155
CSB325-04x0310	145-188***	12	4	217	2250	1390	1750	3261	Ø520	695	2340	1000 x 350	1125	3005	1230
CSB325-04x0312	175-227***	12	4	217	2250	1390	1750	3461	350 x 750	695	2425	1200 x 350	1125	3205	1305
CSB325-04x0407	134-173***	16	4	347	2250	1820	2220	2961	Ø500	910	2050	950 x 350	1125	2705	1530
CSB325-04x0410	193-251***	16	4	347	2250	1820	2220	3261	Ø600	910	2300	1350 x 350	1125	3005	1630
CSB325-04x0412	233-302***	16	4	347	2250	1820	2220	3461	Ø650	910	2475	1600 x 350	1125	3205	1730

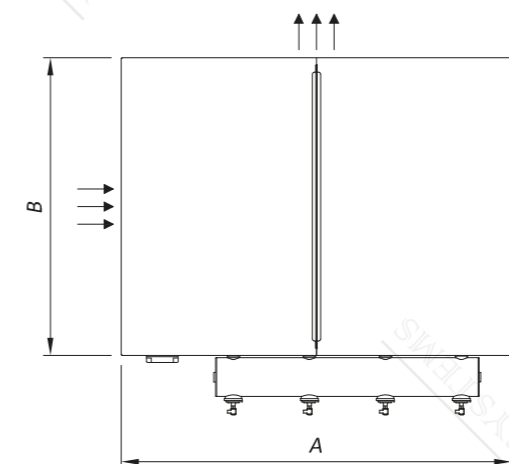

TECHNICAL SPECIFICATIONS		
Max working negative pressure	Pa	5000
Working Temperature	°C	-10<T<60
Electric control panel feeding	230 V AC 50Hz	
Cartridge cleaning system	pulse-jet	
Compressed air tank working pressure	bar	5

\*\*\* Filtering surface for cartridges with 175 pleats

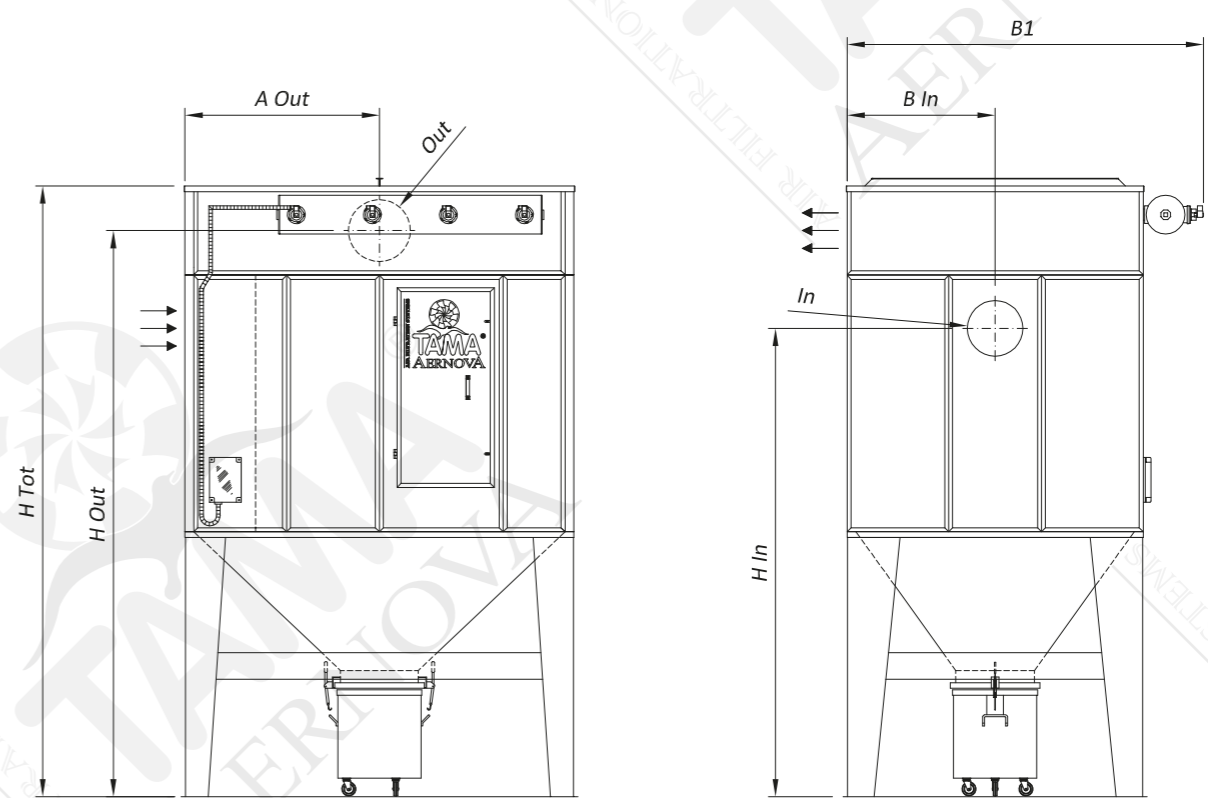