
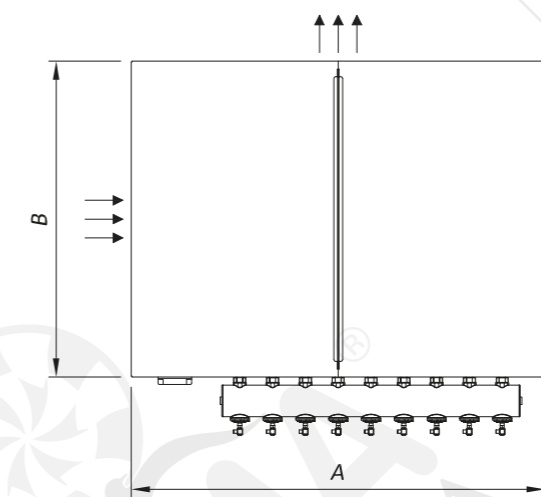



TECHNICAL SPECIFICATIONS					DIMENSIONS										
Model	Filtering surface	Number of filtering elements	Number of cleaning valves	Compressed air consumption	A	B	B1	H Tot	In	B In	H In	Out	A Out	H Out	Weight
	[m ²]	[-]	[-]	[Nl/activ.]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
CSVA04x0515	12	20	4	87	1325	1150	1470	5111	Ø180	312	4360	Ø220	662	4855	820
CSVA04x0520	15	20	4	87	1325	1150	1470	5611	Ø200	312	4850	Ø250	662	5355	920
CSVA04x0525	19	20	4	87	1325	1150	1470	6111	Ø220	312	5340	Ø280	662	5855	995
CSVA06x0515	17	30	6	87	1675	1150	1470	5361	Ø200	312	4600	Ø280	837	5105	980
CSVA06x0520	23	30	6	87	1675	1150	1470	5861	Ø250	312	5075	Ø315	837	5605	1080
CSVA06x0525	29	30	6	87	1675	1150	1470	6361	Ø280	312	5560	Ø350	837	6105	1180
CSVA06x0615	21	36	6	87	1675	1325	1645	5361	Ø220	400	4590	Ø300	837	5105	1035
CSVA06x0620	28	36	6	87	1675	1325	1645	5861	Ø280	400	5060	Ø350	837	5605	1135
CSVA06x0625	35	36	6	87	1675	1325	1645	6361	Ø300	400	5550	350 x 350	837	6105	1260
CSVA06x0715	24	42	6	87	1675	1500	1820	5361	Ø250	750	4575	Ø315	837	5105	1090
CSVA06x0720	32	42	6	87	1675	1500	1820	5861	Ø280	750	5060	350 x 350	837	5605	1190
CSVA06x0725	41	42	6	87	1675	1500	1820	6361	Ø315	750	5542	400 x 350	837	6105	1315
CSVA06x0815	28	48	6	87	1675	1675	1995	5361	Ø280	837	4560	Ø350	837	5105	1150
CSVA06x0820	37	48	6	87	1675	1675	1995	5861	Ø300	837	5050	400 x 350	837	5605	1275
CSVA06x0825	46	48	6	87	1675	1675	1995	6361	Ø350	837	5525	450 x 350	837	6105	1400
CSVA07x0715	28	49	7	87	1850	1500	1820	5361	Ø280	750	4560	Ø350	925	5105	1150
CSVA07x0720	38	49	7	87	1850	1500	1820	5861	Ø315	750	5042	400 x 350	925	5605	1275
CSVA07x0725	47	49	7	87	1850	1500	1820	6361	Ø350	750	5525	450 x 350	925	6105	1400
CSVA07x0815	32	56	7	87	1850	1675	1995	5361	Ø280	837	4560	350 x 350	925	5105	1180
CSVA07x0820	43	56	7	87	1850	1675	1995	5861	Ø315	837	5042	450 x 350	925	5605	1330
CSVA07x0825	54	56	7	87	1850	1675	1995	6361	Ø380	837	5510	550 x 350	925	6105	1480
CSVA08x0815	37	64	8	87	2025	1675	1995	5461	Ø300	837	4650	400 x 350	1012	5205	1315
CSVA08x0820	49	64	8	87	2025	1675	1995	5961	Ø350	837	5125	500 x 350	1012	5705	1465
CSVA08x0825	62	64	8	87	2025	1675	1995	6461	Ø400	837	5600	600 x 350	1012	6205	1615
CSVA09x0815	42	72	9	87	2200	1675	1995	5561	Ø315	837	4742	400 x 350	1100	5305	1370
CSVA09x0820	56	72	9	87	2200	1675	1995	6061	Ø380	837	5210	550 x 350	1100	5805	1495
CSVA09x0825	70	72	9	87	2200	1675	1995	6561	350 x 400	837	5700	700 x 350	1100	6305	1670
CSVA09x0920	63	81	9	87	2200	1850	2170	6061	Ø400	925	5200	600 x 350	1100	5805	1605
CSVA09x0925	78	81	9	87	2200	1850	2170	6561	Ø450	925	5675	750 x 350	1100	6305	1780
CSVA09x0930	94	81	9	217	2200	1850	2210	7061	Ø480	925	6160	900 x 350	1100	6805	1980
CSVA09x1020	70	90	9	87	2200	2025	2345	5961	350 x 400	837	5100	700 x 350	1100	5705	1690
CSVA09x1025	87	90	9	87	2200	2025	2345	6461	350 x 500	837	5550	850 x 350	1100	6205	1865
CSVA09x1030	104	90	9	217	2200	2025	2385	6961	350 x 600	837	6000	1000 x 350	1100	6705	2090

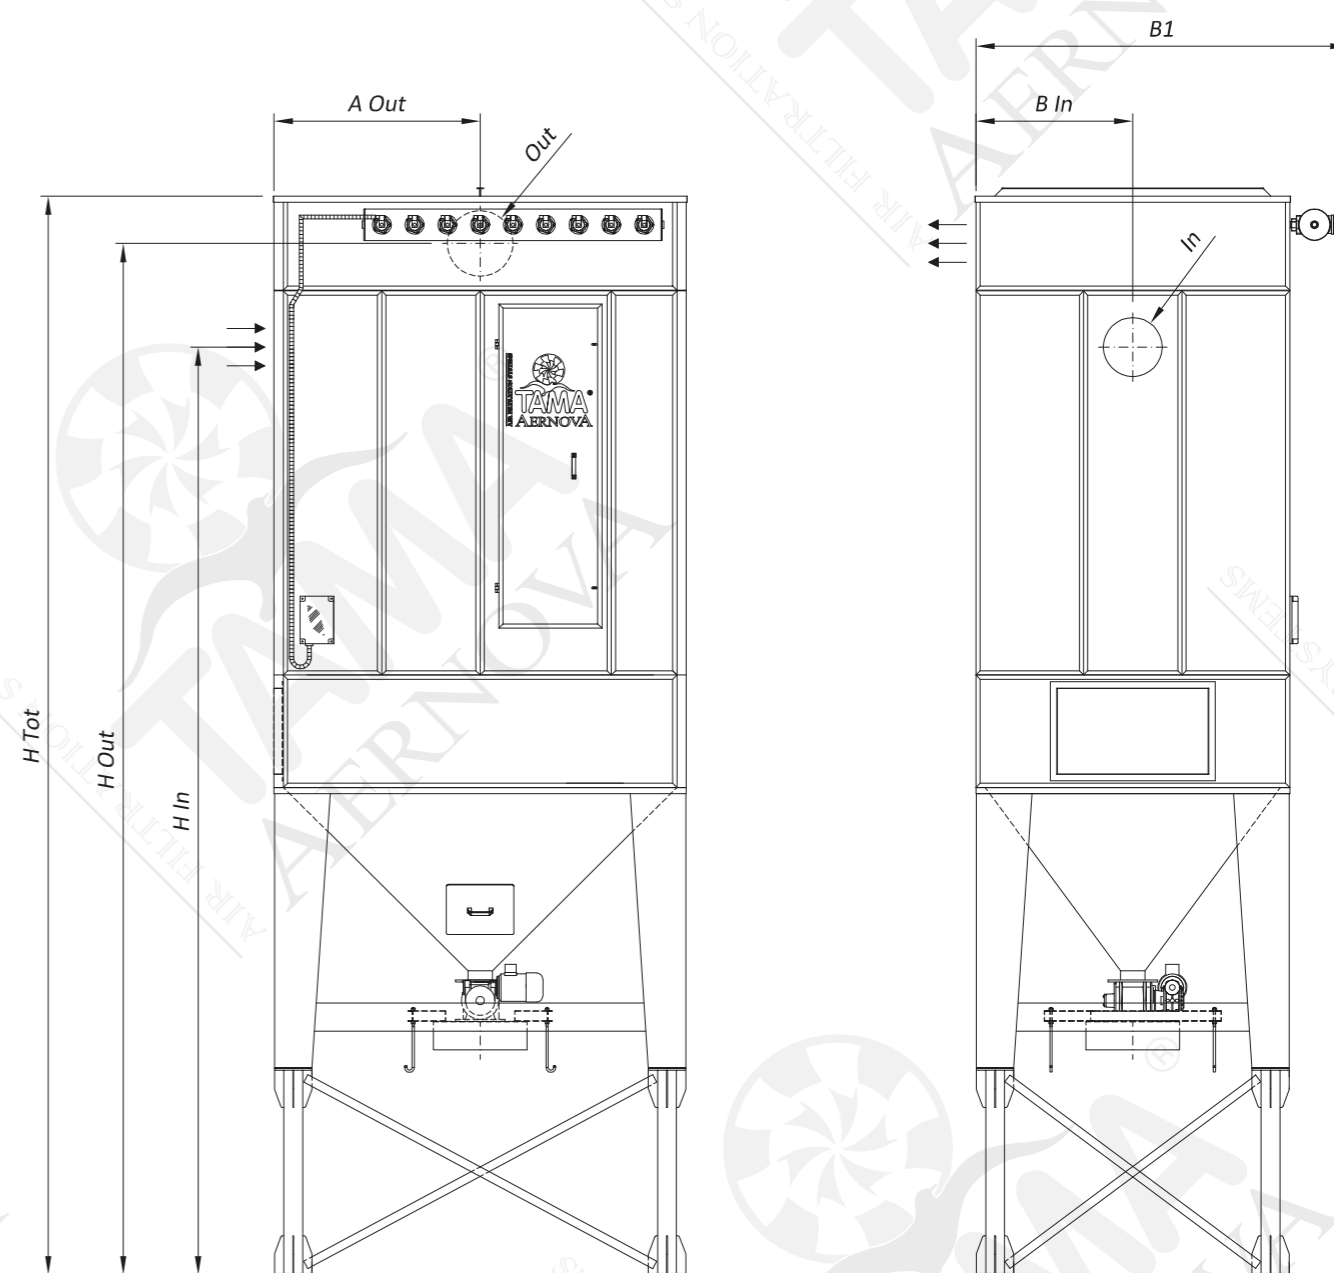



TECHNICAL SPECIFICATIONS		
Certification code	II 3 D Ex h IIIC T200°C Dc -10°C<T<40°C	
Max working negative pressure	Pa	5000
Working Temperature	°C	-10<T<40
Electric control panel feeding	230 V AC 50Hz	
Bag cleaning system	pulse-jet	
Compressed air tank working pressure	bar	5
Rotary valve solid discharge**	mc/h	2
Rotary valve power**	kW	0,5

** The rotary valve is available also with other configurations. The data are referred to a single rotary valve.

EXPLOSION CHARACTERISTICS				DIMENSIONS		
Model	Number of venting panels	P max	Kst	LF	WF	TF
	[-]	[bar]	[m bar/s]	[m]	[m]	[m]
CSVA04x0515	1	8	150	14	4	4
CSVA04x0520	1	8	150	15	5	5
CSVA04x0525	1	8	120	16	5	5
CSVA06x0515	1	8	150	16	5	5
CSVA06x0520	1	8	120	16	5	5
CSVA06x0525	1	8	100	17	5	5
CSVA06x0615	1	8	120	16	5	5
CSVA06x0620	1	8	100	17	5	5
CSVA06x0625	1	8	100	18	5	5
CSVA06x0715	1	8	120	17	5	5
CSVA06x0720	1	8	100	17	5	5
CSVA06x0725	1	8	90	18	5	5
CSVA06x0815	1	8	120	18	5	5
CSVA06x0820	1	8	100	18	5	5
CSVA06x0825	1	8	80	19	6	6
CSVA07x0715	1	8	120	17	5	5
CSVA07x0720	1	8	100	18	5	5
CSVA07x0725	1	8	80	19	6	6
CSVA07x0815	1	8	120	18	5	5
CSVA07x0820	1	8	100	19	6	6
CSVA07x0825	1	8	80	19	6	6
CSVA08x0815	2	8,9	199	19	7	6
CSVA08x0820	2	8	150	19	7	6
CSVA08x0825	2	8	150	20	7	6
CSVA09x0815	2	8,9	199	19	7	6
CSVA09x0820	2	8	150	20	7	6
CSVA09x0825	2	8	150	21	7	6
CSVA09x0920	2	8	150	21	7	6
CSVA09x0925	2	8	150	21	7	6
CSVA09x0930	2	8	120	22	7	6
CSVA09x1020	2	8	150	21	7	6
CSVA09x1025	2	8	150	22	7	6
CSVA09x1030	2	8	120	23	8	7

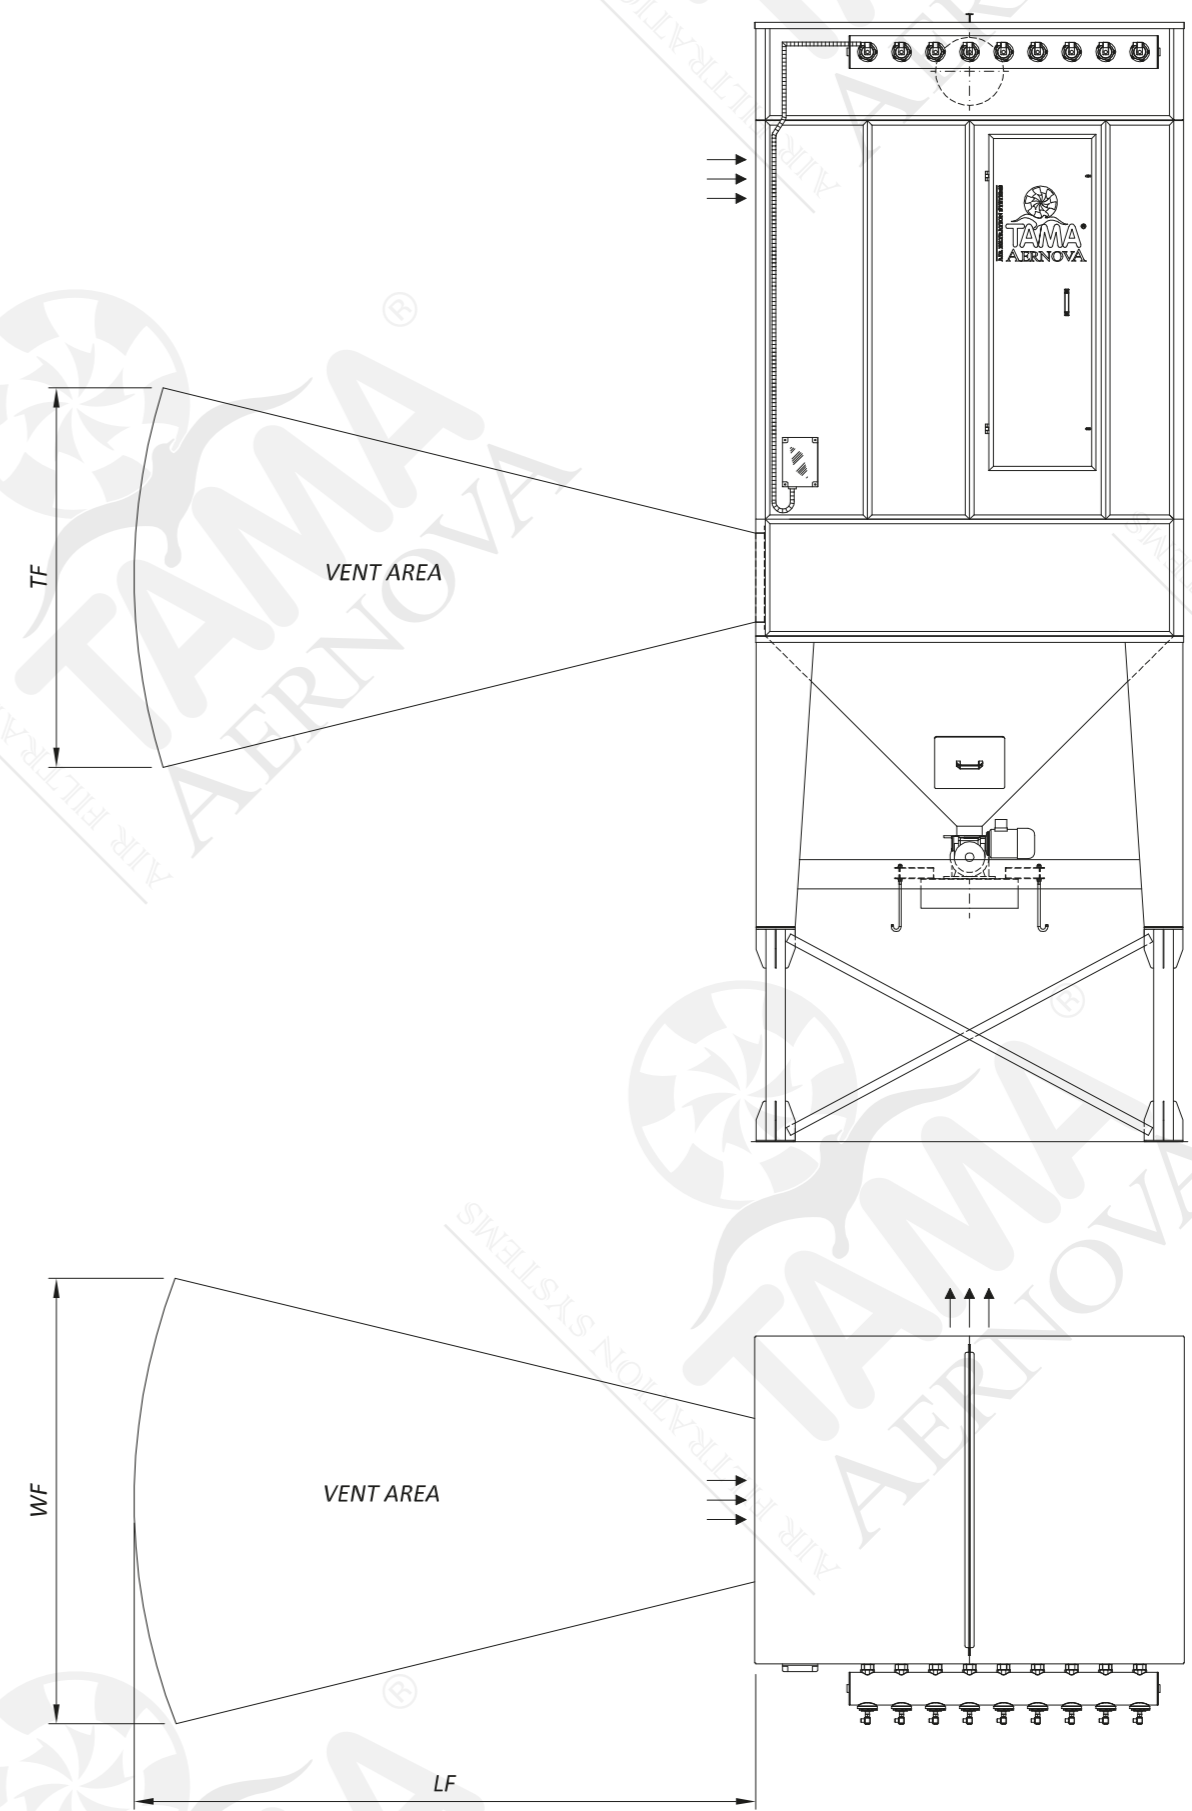



TECHNICAL SPECIFICATIONS						DIMENSIONS											
Model	Filtering surface	Number of filtering elements	Number of hoppers	Number of cleaning valves	Compressed air consumption	A	B	B1	H Tot	In	A In	H In	Out	A Out	A2 Out	H Out	Weight
	[m ²]	[-]	[-]	[-]	[Nl/activ]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
CSVA12x0820	74	96	2	12	87	3075	1675	1995	5961	350 x 450	1537	5075	2 x (400 x 350)	793	1488	5705	2155
CSVA12x0825	93	96	2	12	87	3075	1675	1995	6461	350 x 550	1537	5525	2 x (450 x 350)	793	1488	6205	2380
CSVA12x0830	111	96	2	12	217	3075	1675	2035	6961	350 x 650	1537	5975	2 x (550 x 350)	793	1488	6705	2630
CSVA14x0820	87	112	2	14	87	3425	1675	1995	5961	350 x 500	1712	5050	2 x (450 x 350)	881	1663	5705	2320
CSVA14x0825	108	112	2	14	87	3425	1675	1995	6461	350 x 650	1712	5475	2 x (550 x 350)	881	1663	6205	2570
CSVA14x0830	130	112	2	14	217	3425	1675	2035	6961	350 x 750	1712	5925	2 x (650 x 350)	881	1663	6705	2845
CSVA12x1020	93	120	2	12	87	3075	2025	2345	6061	350 x 550	1537	5125	2 x (450 x 350)	793	1488	5805	2460
CSVA12x1025	116	120	2	12	87	3075	2025	2345	6561	350 x 700	1537	5550	2 x (600 x 350)	793	1488	6305	2710
CSVA12x1030	139	120	2	12	217	3075	2025	2385	7061	350 x 800	1537	6000	2 x (700 x 350)	793	1488	6805	2985
CSVA16x0820	99	128	2	16	87	3775	1675	1995	6061	350 x 600	1887	5100	2 x (500 x 350)	968	1838	5805	2485
CSVA16x0825	124	128	2	16	87	3775	1675	1995	6561	350 x 750	1887	5525	2 x (600 x 350)	968	1838	6305	2760
CSVA16x0830	148	128	2	16	217	3775	1675	2035	7061	350 x 850	1887	5975	2 x (750 x 350)	968	1838	6805	3060
CSVA18x0820	111	144	2	18	87	4125	1675	1995	6161	350 x 650	2062	5175	2 x (550 x 350)	1056	2013	5905	2675
CSVA18x0825	139	144	2	18	87	4125	1675	1995	6661	350 x 800	2062	5600	2 x (700 x 350)	1056	2013	6405	2950
CSVA18x0830	167	144	2	18	217	4125	1675	2035	7161	350 x 1000	2062	6000	2 x (800 x 350)	1056	2013	6905	3275
CSVA18x0920	125	162	2	18	87	4125	1850	2170	6161	350 x 750	2062	5125	2 x (600 x 350)	1056	2013	5905	2790
CSVA18x0925	156	162	2	18	87	4125	1850	2170	6661	350 x 900	2062	5550	2 x (750 x 350)	1056	2013	6405	3065
CSVA18x0930	188	162	2	18	217	4125	1850	2210	7161	350 x 1100	2062	5950	2 x (900 x 350)	1056	2013	6905	3415
CSVA22x0820	136	176	2	22	87	4825	1675	1995	6461	350 x 800	2412	5400	2 x (650 x 350)	1231	2363	6205	3005
CSVA22x0825	170	176	2	22	87	4825	1675	1995	6961	350 x 1000	2412	5800	2 x (850 x 350)	1231	2363	6705	3330
CSVA22x0830	204	176	2	22	217	4825	1675	2035	7461	350 x 1200	2412	6200	2 x (1000 x 350)	1231	2363	7205	3730
CSVA18x1020	139	180	2	18	87	4125	2025	2345	6061	350 x 800	2062	5000	2 x (700 x 350)	1056	2013	5805	2960
CSVA18x1025	174	180	2	18	87	4125	2025	2345	6561	350 x 1000	2062	5400	2 x (850 x 350)	1056	2013	6305	3260
CSVA18x1030	209	180	2	18	217	4125	2025	2385	7061	350 x 1200	2062	5800	2 x (1000 x 350)	1056	2013	6805	3635

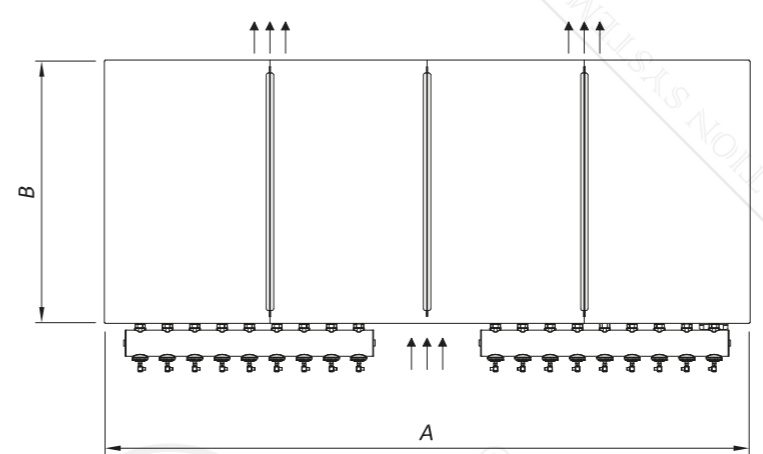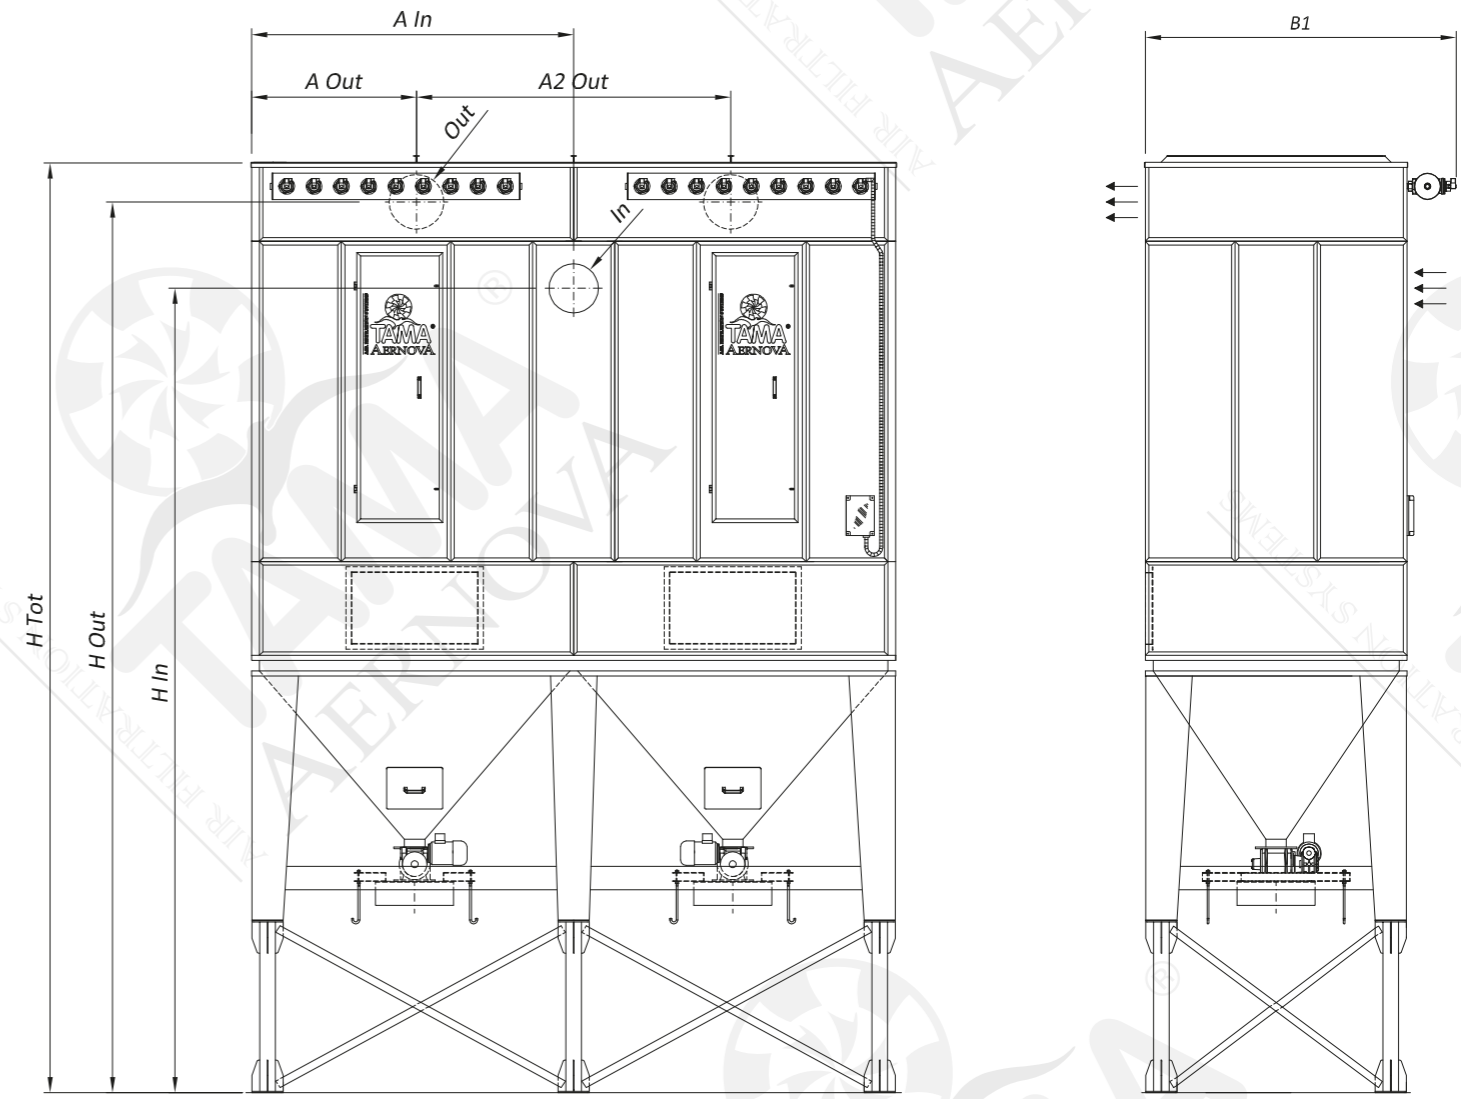


TECHNICAL SPECIFICATIONS		
Certification code	II 3 D Ex h IIC T200°C Dc -10°C<T<40°C	
Max working negative pressure	Pa	5000
Working Temperature	°C	-10<T<40
Electric control panel feeding	230 V AC 50Hz	
Bag cleaning system	pulse-jet	
Compressed air tank working pressure	bar	5
Rotary valve solid discharge**	mc/h	2
Rotary valve power**	kW	0,5

** The rotary valve is available also with other configurations. The data are referred to a single rotary valve.

EXPLOSION CHARACTERISTICS				DIMENSIONS		
Model	Number of venting panels	P max	Kst	LF	WF	TF
	[-]	[bar]	[m bar/s]	[m]	[m]	[m]
CSVA12x0820	3	8,9	199	22	9	7
CSVA12x0825	3	8	150	23	9	7
CSVA12x0830	3	8	150	24	9	7
CSVA14x0820	3	8,9	199	23	9	7
CSVA14x0825	3	8	150	24	9	7
CSVA14x0830	3	8	150	25	9	7
CSVA12x1020	3	8,9	199	24	9	7
CSVA12x1025	3	8	150	25	9	7
CSVA12x1030	3	8	150	26	10	8
CSVA16x0820	3	8,9	199	24	10	7
CSVA16x0825	4	8,9	199	25	10	7
CSVA16x0830	4	8,9	199	25	10	7
CSVA18x0820	3	8,9	199	24	10	7
CSVA18x0825	4	8,9	199	25	10	7
CSVA18x0830	4	8,9	199	26	11	8
CSVA18x0920	3	8,9	199	25	10	7
CSVA18x0925	4	8,9	199	26	11	8
CSVA18x0930	4	8,9	199	27	11	8
CSVA22x0820	3	8,9	199	26	11	8
CSVA22x0825	4	8,9	199	27	12	8
CSVA22x0830	5	8,9	199	28	12	8
CSVA18x1020	4	8,9	199	26	11	8
CSVA18x1025	4	8,9	199	27	11	8
CSVA18x1030	4	8	150	28	11	8

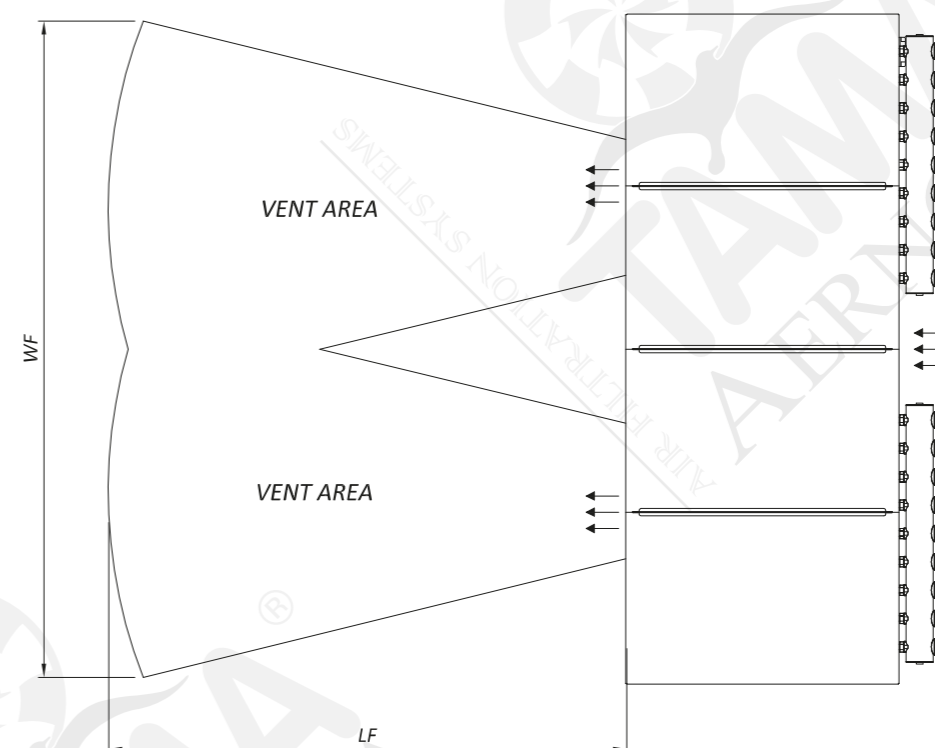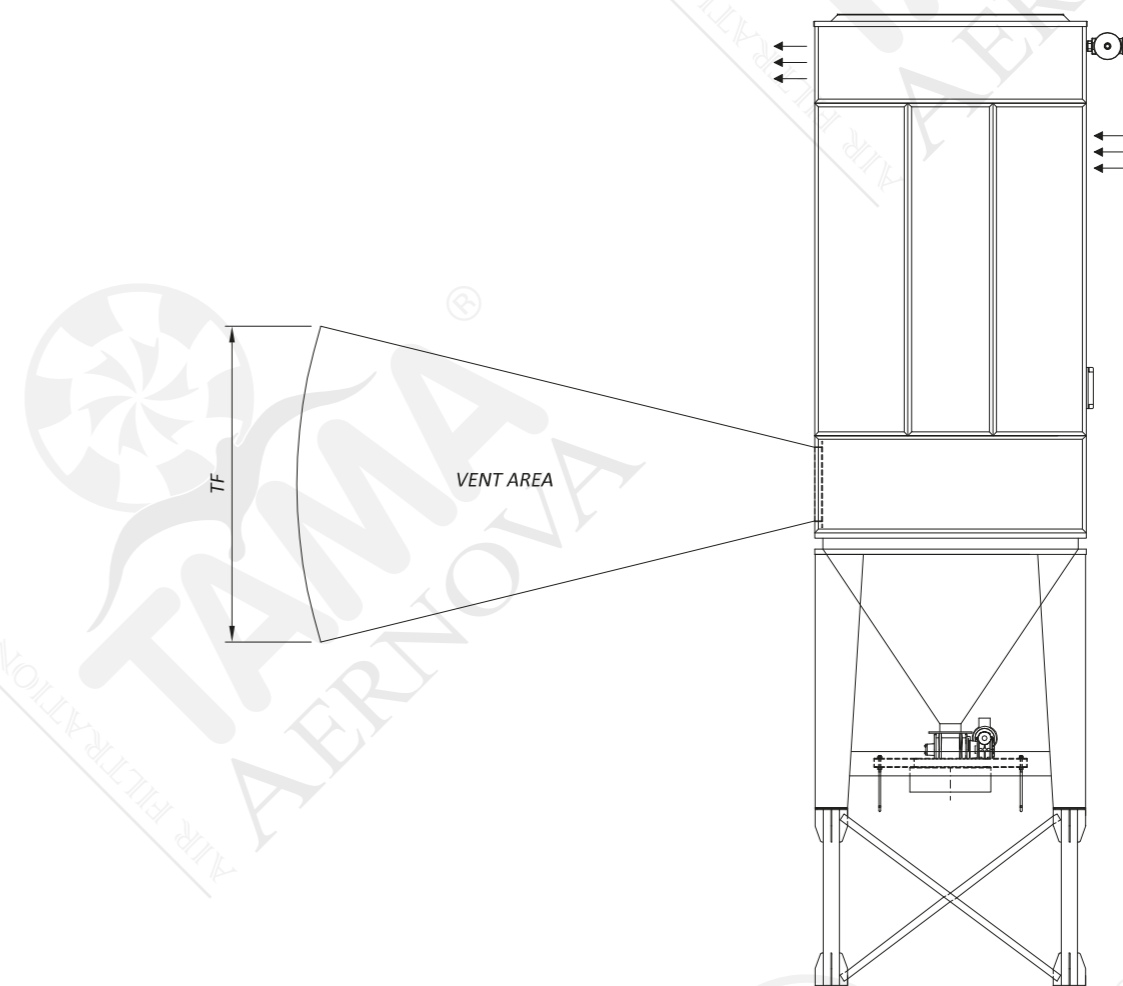

TECHNICAL SPECIFICATIONS						DIMENSIONS												
Model	Filtering surface	Number of filtering elements	Number of hoppers	Number of cleaning valves	Compressed air consumption	A	B	B1	H Tot	In	A In	A2 In	H In	Out	A Out	A2 Out	H Out	Weight
	[m ²]	[-]	[-]	[-]	[NI/activ]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
CSVA24x0820	148	192	3	24	87	4825	2025	1995	6061	3 x (Ø350)	1100	1313	5225	3 x (500 x 350)	1100	1313	5805	3455
CSVA24x0825	185	192	3	24	87	4825	2025	1995	6561	3 x (Ø400)	1100	1313	5700	3 x (600 x 350)	1100	1313	6305	3805
CSVA24x0830	222	192	3	24	217	4825	2025	2035	7061	3 x (350 x 450)	1100	1313	6175	3 x (750 x 350)	1100	1313	6805	4205
CSVA27x0820	167	216	3	27	87	5350	2025	1995	6061	3 x (Ø380)	925	1750	5210	3 x (550 x 350)	925	1750	5805	3700
CSVA27x0825	209	216	3	27	87	5350	2025	1995	6561	3 x (Ø420)	925	1750	5690	3 x (700 x 350)	925	1750	6305	4075
CSVA27x0830	250	216	3	27	217	5350	2025	2035	7061	3 x (Ø450)	925	1750	6175	3 x (800 x 350)	925	1750	6805	4525
CSVA27x0920	188	243	3	27	87	5350	2375	2345	6161	3 x (Ø400)	925	1750	5300	3 x (600 x 350)	925	1750	5905	4170
CSVA27x0925	235	243	3	27	87	5350	2375	2345	6661	3 x (Ø450)	925	1750	5775	3 x (750 x 350)	925	1750	6405	4570
CSVA27x0930	282	243	3	27	217	5350	2375	2385	7161	3 x (Ø480)	925	1750	6260	3 x (900 x 350)	925	1750	6905	5045
CSVA30x1020	232	300	3	30	87	5875	2375	2345	6461	3 x (350 x 450)	1012	1925	5575	3 x (750 x 350)	1012	1925	6205	4570
CSVA30x1025	290	300	3	30	87	5875	2375	2345	6961	3 x (350 x 600)	1012	1925	6000	3 x (950 x 350)	1012	1925	6705	5020
CSVA30x1030	348	300	3	30	217	5875	2375	2385	7461	3 x (350 x 700)	1012	1925	6450	3 x (1150 x 350)	1012	1925	7205	5595
CSVA33x1020	255	330	3	33	87	6400	2375	2345	6461	3 x (Ø480)	1100	2100	5560	3 x (850 x 350)	1100	2100	6205	4870
CSVA33x1025	319	330	3	33	87	6400	2375	2345	6961	3 x (Ø520)	1100	2100	6040	3 x (1050 x 350)	1100	2100	6705	5345
CSVA33x1030	382	330	3	33	217	6400	2375	2385	7461	3 x (Ø580)	1100	2100	6510	3 x (1250 x 350)	1100	2100	7205	5945
CSVA36x1020	278	360	3	36	87	6925	2375	2345	6461	3 x (350 x 550)	1012	2450	5525	3 x (900 x 350)	1012	2450	6205	5175
CSVA36x1025	348	360	3	36	87	6925	2375	2345	6961	3 x (350 x 700)	1012	2450	5950	3 x (1150 x 350)	1012	2450	6705	5675
CSVA36x1030	417	360	3	36	217	6925	2375	2385	7461	3 x (350 x 800)	1012	2450	6400	3 x (1350 x 350)	1012	2450	7205	6325
CSVA44x1025	425	440	4	44	217	8500	2375	2385	6961	4 x (Ø520)	1100	2100	6040	4 x (1050 x 350)	1100	2100	6705	7175
CSVA44x1030	510	440	4	44	217	8500	2375	2385	7461	4 x (Ø580)	1100	2100	6510	4 x (1250 x 350)	1100	2100	7205	7825
CSVA50x1025	483	500	5	50	217	9725	2375	2385	6961	5 x (350 x 600)	1012	1925	6000	5 x (950 x 350)	1012	1925	6705	8385
CSVA50x1030	579	500	5	50	217	9725	2375	2385	7461	5 x (350 x 700)	1012	1925	6450	5 x (1150 x 350)	1012	1925	7205	9085
CSVA60x1025	579	600	6	60	217	11650	2375	2385	6961	6 x (350 x 600)	1012	1925	6000	6 x (950 x 350)	1012	1925	6705	10105
CSVA60x1030	695	600	6	60	217	11650	2375	2385	7461	6 x (350 x 700)	1012	1925	6450	6 x (1150 x 350)	1012	1925	7205	10930

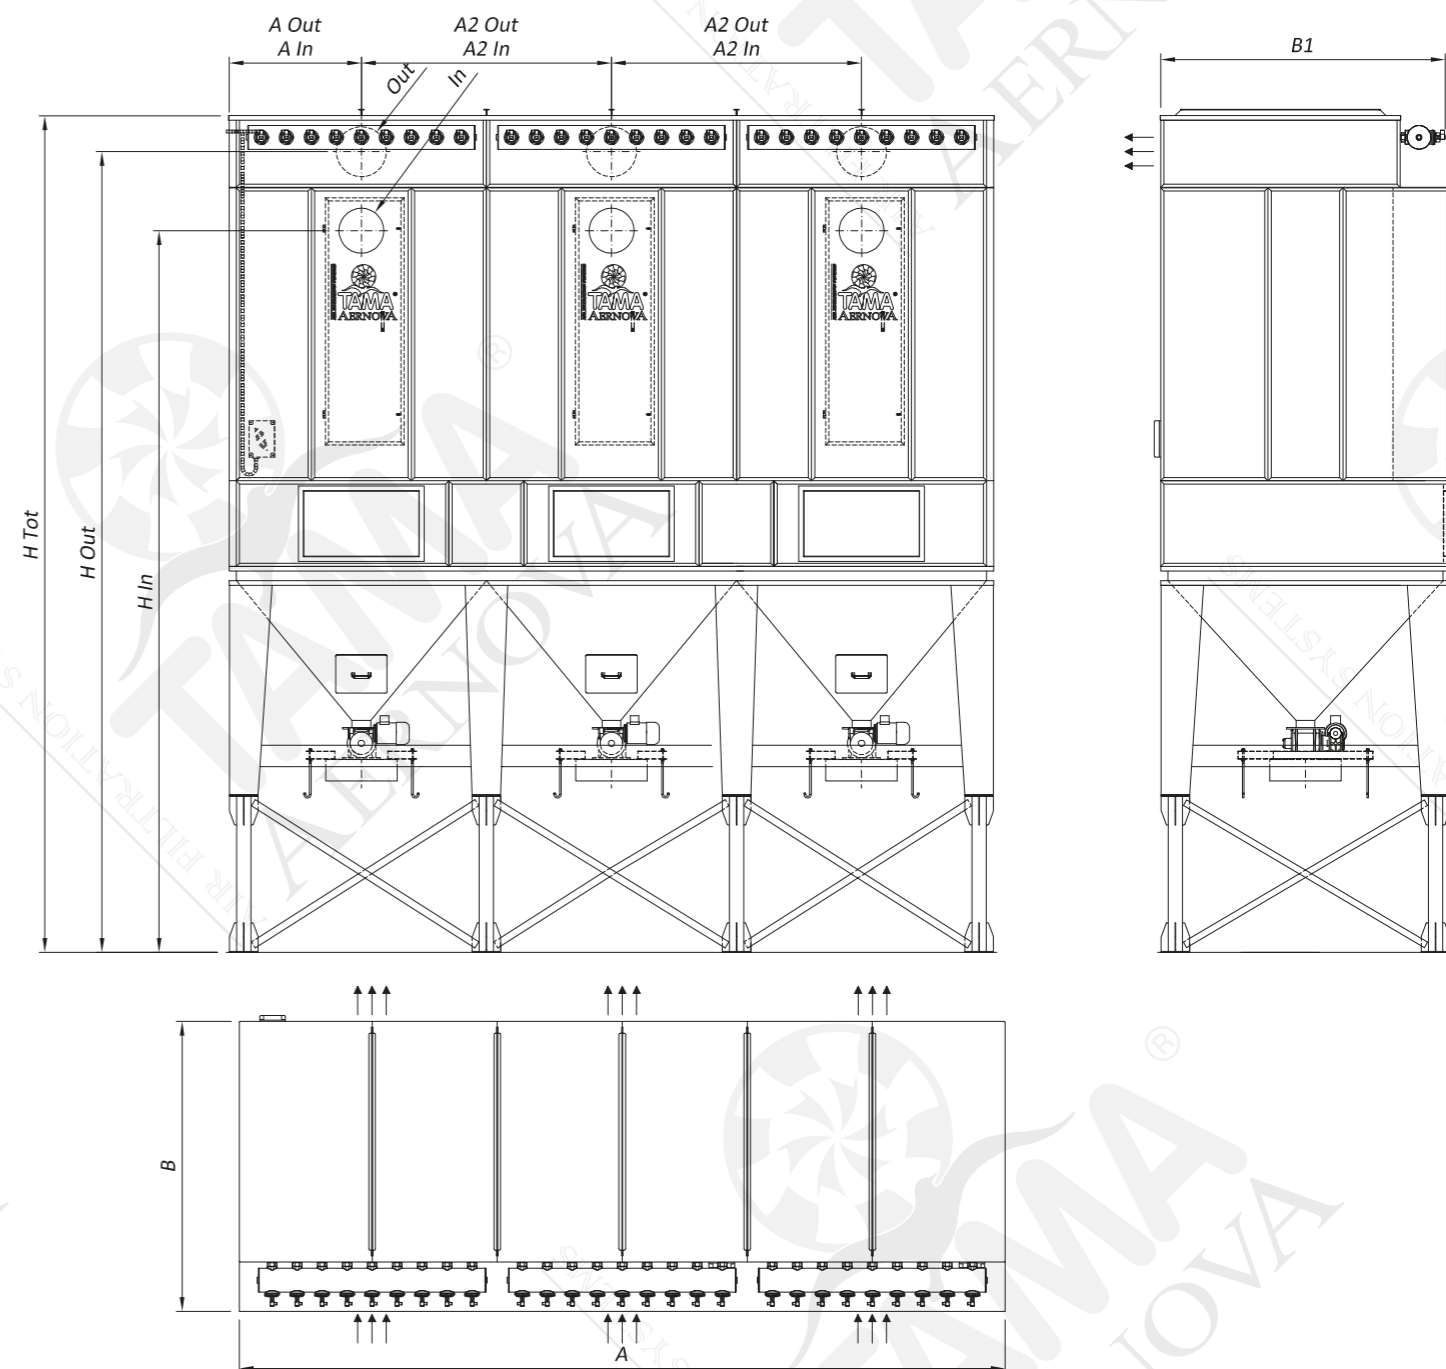

TECHNICAL SPECIFICATIONS		
Certification code	II 3 D Ex h IIC T200°C Dc -10°C<T<40°C	
Max working negative pressure	Pa	5000
Working Temperature	°C	-10<T<40
Electric control panel feeding	230 V AC 50Hz	
Bag cleaning system	pulse-jet	
Compressed air tank working pressure	bar	5
Rotary valve solid discharge**	mc/h	2
Rotary valve power**	kW	0,5

** The rotary valve is available also with other configurations. The data are referred to a single rotary valve.

EXPLOSION CHARACTERISTICS				DIMENSIONS		
Model	Number of venting panels	P max	Kst	LF	WF	TF
	[-]	[bar]	[m bar/s]	[m]	[m]	[m]
CSVA24x0820	4	8,9	199	28	12	8
CSVA24x0825	4	8,9	199	27	12	8
CSVA24x0830	5	8,9	199	30	13	9
CSVA27x0820	4	8,9	199	29	12	8
CSVA27x0825	5	8,9	199	30	13	9
CSVA27x0830	5	8,9	199	31	13	9
CSVA27x0920	5	8,9	199	31	13	9
CSVA27x0925	5	8,9	199	32	13	9
CSVA27x0930	5	8,9	199	33	14	10
CSVA30x1020	5	8,9	199	32	14	9
CSVA30x1025	5	8,9	199	33	14	9
CSVA30x1030	6	8,9	199	34	15	10
CSVA33x1020	6	8,9	199	32	14	9
CSVA33x1025	6	8,9	199	33	15	10
CSVA33x1030	6	8,9	199	34	15	10
CSVA36x1020	6	8,9	199	33	16	10
CSVA36x1025	6	8,9	199	34	16	10
CSVA36x1030	7	8,9	199	35	16	10
CSVA44x1025	7	8,9	199	37	18	11
CSVA44x1030	8	8,9	199	38	18	11
CSVA50x1025	8	8,9	199	39	19	11
CSVA50x1030	8	8,9	199	40	19	11
CSVA60x1025	9	8,9	199	41	22	12
CSVA60x1030	9	8,9	199	42	22	12

